

VCC13CC

THIRTEEN



DRIFT BUTTON: NISSAN INSTALLATION INSTRUCTIONS:

**PART NUMBER:
DBNS-0100**

We recommend that installation of all Voodoo13 parts be completed by a professional who is experienced in suspension tuning. With proper installation and maintenance, Voodoo13 suspension products will provide exceptional performance and durability. For any questions, please contact Voodoo13 immediately. We thank you for choosing Voodoo13 for your suspension tuning needs!

NEED HELP?

Our representatives are here to help you with any questions concerning the operation of this product.

CALL 480-889-0812


Monday thru Friday 8:30am to 5:30pm MST

RECOMMENDED TOOLS AND SUPPLIES

- General Mechanics Tool Set
- Flat Head Screwdriver
- Pliers

PART BREAKDOWN

NOTE: For any OE hardware please refer to OEM service manual for torque specifications. For all included hardware please torque to specifications shown below.

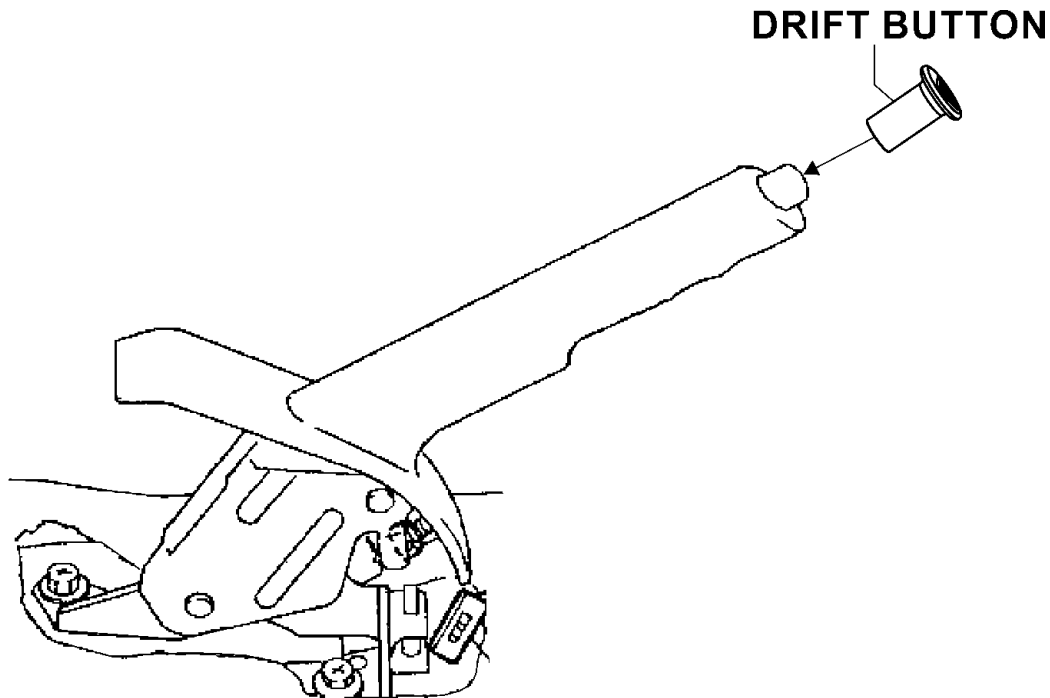

INSTALLATION PROCEDURE

Step 1: Remove the E-Brake boot to access the internal workings of the handbrake mechanism. Removing the center console maybe necessary to access the boot.

Step 2: There are two options to remove the spring. **First option**, use a flat head screwdriver to bend the tabs securing the spring outward. Tabs should be bent flush along the surface of the handle to allow the spring to be released. Then remove the spring. **Second option**, use pliers to remove the spring.

Step 3: Reinstall the E-Brake boot over the handbrake.

Step 4: Then slip over the original button with the drift button. Should be a snug fit. If there is a fitment issue, use some heat on the drift button. Leave the button pushed in to disable the locking mechanism of the handbrake. Extend the button out to engage the handbrake for parking.

Step 5: Enjoy some drifting action with your newly installed drift button. Please keep drifting off public roads.

WARRANTY

All products sold are subject to the following warranty:

Voodoo13 offers a Limited Lifetime Warranty for our products to the original retail consumer against defects and workmanship when used on light truck and car applications under normal operating conditions. This warranty does not apply to parts that have been improperly installed or wearable items such as, but not limited to, worn bushings or bearings unless proven to be defective from the manufacturer.

Exterior finish on all Voodoo13 products is not considered a valid warranty; consumers are responsible for the maintenance of paint, anodize or raw metal finish.

The consumer will be responsible for the removal and freight costs both to and from the Distributor from which the product was originally purchased. Proof of purchase and product registration through the Voodoo13 website is mandatory in order to receive warrantee replacement; original invoice from the Distributor from which the product was purchased must accompany the product in question for warrantee.

Voodoo13 has the right to refuse a warrantee claim if procedures are not met by the original consumer. All returns must have an R.M.A. approval from Voodoo13 prior to shipping direct to the Voodoo13 facility. Exclusions from this warranty are sales outside of the United States, the finish, dents, rust, or any condition caused by abnormal use or neglect.

WARNING

High performance parts. For off-road use only. Installation should be carried out by a qualified facility. Improper use or installation may result in injury or death.



VOODOO13
254 W Broadway Rd
Mesa, AZ 85210
Ph: 480.889.0812
Fax: 480.829.8103
www.VOODOO13USA.com